

## TriStar™



### Available options:

- GritBlocker
- Anti Slip Coating (60+ PSRV)
- Ventilation Holes
- Badging
- Safety Grille
- Sealing Plate
- ScrewLift
- Locking

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. Published August 2019 - Version 15.MT



SCAN QR  
CODE FOR  
MORE INFO



## Access Cover D400 TriStar™ Dia 600x100


### Ductile Iron Hinged & Square Frame Group 4

Wrekin's range of D400 group 4, circular hinged access covers fully comply with BS EN 124:2015 and carry the BSI Kitemark Standard. The hinge allows the cover to be opened or removed for one man entry and the cover features a spring bar.

| WREKIN PRODUCTS'<br>STOCK CODE | OVERALL FRAME<br>(A x B mm) | CLEAR OPENING<br>(C mm) | BASE OPENING<br>(E mm) | FRAME DEPTH<br>(F mm) |
|--------------------------------|-----------------------------|-------------------------|------------------------|-----------------------|
| DMS1D4/60D/KTSF                | 780 x 780                   | Ø600                    | Ø650                   | 100                   |

- For use in a Group 4 D400 class environment
- Fully compliant with BS EN 124:2015
- Third party certified by BSI
- Hinged product for ease of access
- Manufactured from strong and highly durable ductile iron
- Spring bar - low security locking feature
- Safety-stop hinges prevents covers falling once open
- Safety keyway - ensures key's secure in keyway when lifting
- Single indexed cover ensures correct fitting
- Leverage point
- Replaceable polymeric seat for non rock stability

Dimensions:

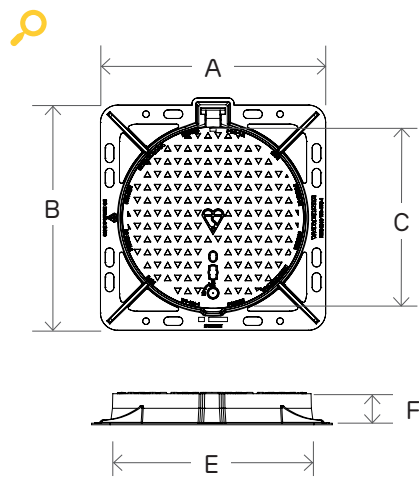

| Diagram Key              |                   |                  |                 |
|--------------------------|-------------------|------------------|-----------------|
| AxB - Overall Frame Size | C - Clear Opening | E - Base Opening | F - Frame Depth |