CAVANAGH HIPPO DUAL

DATA SHEET
0032 REV 00

GRATINGS

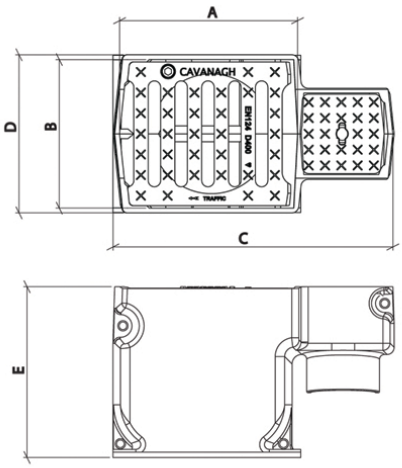

GROUP 4
Carriageways of roads (including pedestrian streets), hard shoulders and parking areas, for all types of road vehicles.



FEATURES

- **Dual function gully adapts easily to suit bottom or back outlet**
- **Outlet suitable for 6 inch plastic pipe fitting**
- **Material - ductile iron**
- **Increased capacity to 40 litres**
- **Grating reversible, end hinged and flat**
- **Integral trap minimises back odours**
- **Unique design for stable installation**
- **Larger waterway area 540 cm^2**
- **Hinged cleaning eye cover for rodding access**

Weights and dimensions are subject to change and foundry tolerances

PRODUCT STANDARD
EN124

LOADING CLASS
D400

GROUP 4 INSTALLATION

SECURITY

OPTIONS

- **Can be locked. Cavanagh ref. C021**

TO SPECIFY

Cavanagh Hippo Dual or similar approved manufactured in ductile iron. Overall dimensions shall be 620 x 410 x 418mm. Grating opening shall be 410 x 390mm. Integral trap to minimise back odours from foul sewer and a cleaning eye to allow for rodding access must be incorporated as part of the product. Grating shall have a clear waterway in excess of 640 cm.^{2}

TECHNICAL DATA

Grating Opening (mm) A x B	Overall Dimensions (mm) C x D	Height (mm) E	Total Kg	Cavanagh Ref.
410 x 390	620 x 410	418	109	C020

CAVANAGH
LEADERS IN ROAD FURNITURE SOLUTIONS

Cavanagh Foundry Limited
Birr, County Offaly, Ireland

An EJ GROUP Company

Tel: +353 57 91 20277
Fax: +353 57 91 20954
sales@cavanagh.ie
www.cavanaghfoundry.com