

## FEATURES / SPECIFICATIONS

- Floor standing close-coupled toilet
- Vitreous china vortex wash-down bowl
- Dual-flush
- Dual trap outlet: 180 mm, Ø102 mm
- 400 mm bowl height (w/out seat)
- Installed dimensions: 630 x 375 x 765 mm
- 30 kg ceramic bowl weight
- 11 kg ceramic cistern weight
- Double chrome button activation
- Roca inlet and flush valve
- Cistern set to 4.5/3L flush, can operate at 4/2L flush
- Dynamic water pressure: 0,1 - 10 bar
- See Roca catalogue or web for available colours



## MODELS / REFERENCES

| Reference  |              | Description                          | Comments                   |
|------------|--------------|--------------------------------------|----------------------------|
| A342V16... | Bowl         | WC FS CC 630 DUAL VORTEX             | Includes all fittings      |
| A341V10... | Cistern      | Cistern lateral inlet G3/8 (Ø19 mm)  | 4,5/3 L Includes valve kit |
| A341V11... |              | Cistern bottom inlet G3/8 (Ø19 mm)   | 4,5/3 L Includes valve kit |
| A341V1C... |              | Cistern bottom inlet G1/2 (Ø23 mm)   | 4,5/3 L Includes valve kit |
| A801F70..1 | Seat & cover | Urea, metal hinges, standard close   | -                          |
| A801F72..1 |              | Urea, metal hinges, soft close       | -                          |
| A801F72..2 |              | Urea, metal hinges, soft close, slim | -                          |

## COMPATIBLE / RECOMMENDED ACCESSORIES

| Reference  |             | Description                                  | Comments |
|------------|-------------|----------------------------------------------|----------|
| A525164400 | Angle valve | Ceramic angle valve G1/2-G3/8                | -        |
| A525164500 |             | Ceramic angle valve G1/2-G1/2 (UK-AU)        | -        |
| AV0007700R | Outlet      | S-Trap outlet pipe, rough-in 210 mm          | -        |
| AV0007900R |             | S-Trap outlet pipe, rough-in 150 mm          | -        |
| -          |             | S-Trap outlet pipe (Market), rough-in 120 mm | -        |
| -          |             | Straight outlet pipe (Market)                | -        |

## STANDARDS


Meets the following standards

|    |                         |
|----|-------------------------|
| EU | EN 33                   |
|    | EN 997 according to DoP |
|    | EN 14124                |

## INSTALLATION NOTES

- Install this product according to installations instructions provided.
- Floor mounted bowl, lateral fixing kit with corrosion resistant screws and chrome caps.
- Cistern is fixed directly to the close-coupled toilet with two stainless steel screws, without the need for wall fixing installation.
- Cistern, seat & cover and recommended accessories are not included. They must be ordered separately.

## PRODUCT DIAGRAM

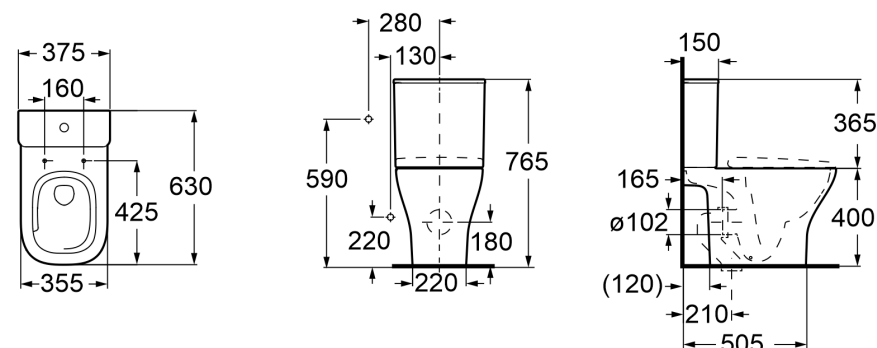

| OUTLET FLUSH PIPE |            |        |     |
|-------------------|------------|--------|-----|
| ROCA (GM)         |            | MARKET |     |
| AV0007700R        | AV0007900R | ~80    | 180 |
|                   |            |        |     |
| 210               | 150        | 120    | 165 |

All dimensions are nominal, in millimetres, and are subject to normal manufacturing variations.  
Dimensions and specifications are subject to change without prior notice.

June 2025  
Replaces previous publications