
Lansdowne

SCAN HERE

Rustic effect facing brick.

Lansdowne facing brick is manufactured with a warm and aged feel. Lansdowne bricks are known for their hard-wearing capabilities and exceptional long-lasting colours.




Size

- Tumbled to give an aged, rustic appearance
- Evokes timeless warmth and elegance
- Vibrant long-lasting colours
- Suitable for both modern and period properties


A
Aged

Finish


Heather

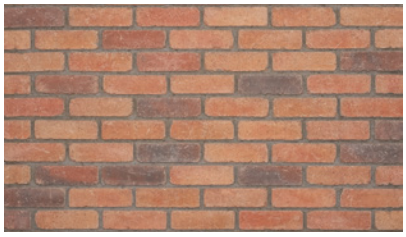


Cottage Red

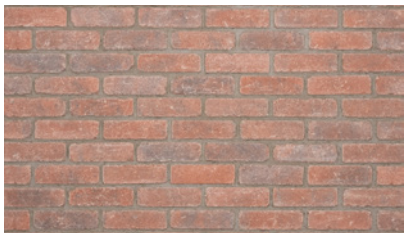

Moorland

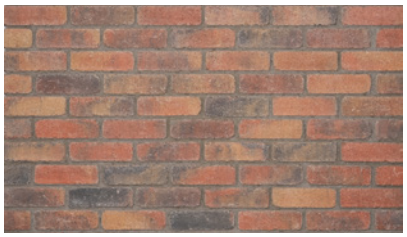


Autumn Gold

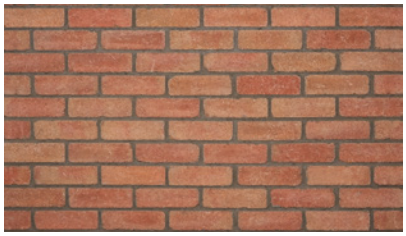


Meadow Gold



Multi Buff

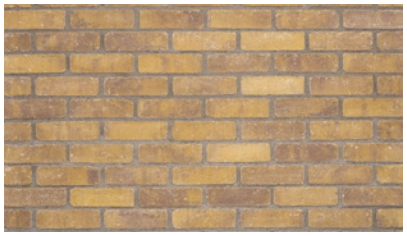

Burren

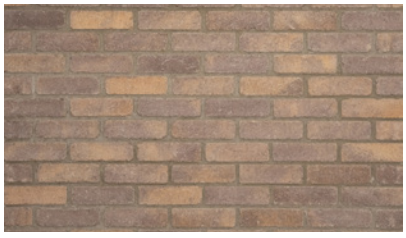

Charcoal



Slate



Lansdowne





Specification

Product type	Concrete facing brick
Manufactured to	BS EN 771-3:2011+A1 2015 Specification for Masonry Units:Aggregate Concrete Masonry Units
Brick type	Frogged
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Mean compressive strength	22N / mm² Air Dry
Dimensional stability (Moisture movement / shrinkage)	<0.6mm / m
Weight	2.8kg per brick (average)
Durability	Frost Resistant (severe exposure)
Tolerances	Category D2
Reaction to fire	Class A1
Water vapour permeability	5 / 15 μ (Tabulated from EN 1745:2012 Annex A)
Water absorption	4.5g / (m² x s) BS EN 772-11:2011
Soluble salts	S2
Direct Airborne Sound Insulation- Gross density	1880 kg/m³
Shear bond strength	0.15N / mm² (Tabulated from EN 998-2: 2016, Annex C)
Flexural Bond Strength	NPD
Thermal Resistance (Conductivity)	1.11W /mK Dry
Mortars & Expansion Joints	Refer to BS 5628-3:2005
Bed Reinforcement	Refer to BS 5628-3:2005
Installed to	Refer to BS 5628-3:2005
NHBC	**Plus** F10 215 **Create** 45-80-50/302
Applications	Please refer to Table 15 of PD 6697: 2010. For further details please refer to www.tobermore.co.uk
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 10%
Carbon footprint	0.31kg Co^2e / unit
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breeam rating www.**bre**.co.uk	**A+**, according to the Green Guide to Specification, 4th Edition 2009.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 quality management. Manufacturing facilities are accredited to ISO 14001:2015 environmental management. The company publish environmental labels and declarations in accordance with BES 6001.

Stock

product	size (mm)	colours available	in stock	no. per pack	no. per slice	weight kg per pack GB	weight kg per pack NI/ROI
Lansdowne	215 x 100 x 65	Autumn Gold, Burren, Charcoal, Cottage Red, Heather, Meadow Gold, Moorland, Multi Buff, Slate	Yes	480	96	1348	1348

Contact Us
GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email
technical@tobermore.co.uk
sales@tobermore.co.uk