SCAN HERE

Pedesta

Attractive smooth finish.

The hard-wearing smooth surface of Pedesta creates a vibrant look in a popular rectangular format. Our PrimeTop manufacturing process creates colours which retain their vibrancy for longer than many other options on the market.

- Superb hard-wearing smooth surface
- Vibrant long-lasting colours
- Rectangular profile allows the creation of distinctive patterns
- Creates a stunning, smooth look



200 x 100mm

Sizes



50mm
60mm
80mm

Depths

PrimeTop®

Finish	Also available as	Refer to relevant guidance in BS 7533			
S Smooth	Permeable	Pedestrian Use	Light Traffic	Commercial Traffic	BIM Level 2



Pedesta





Specification

PrimeTop®

Product type	Concrete Paving Block
Manufactured to	BS EN 1338:2003
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m^3 cement
Surface Finish	Smooth
Chamfer	Standard
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Tensile Splitting Strength	Characteristic tensile splitting strength not less than 3.6 MPa
Slip/Skid Resistance	Mean polished skid resistance value (PSRV) >45 Mean unpolished skid resistance value (USRV) >45
Installed to	BS 7533-102:2025
NSS	**Plus** Q24 110 **Create** 45-20-64/400
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm
Abrasion Resistance (mm)	≤ 23mm (Wide Wheel Abrasion Test) Class 3
Durability (Freeze-thaw)	≤ 1.0 kg/m^2 as a mean with no individual value > 1.5 kg/m^2 Class 3
External Fire Performance	Deemed to satisfy when used for roofing
Reaction to Fire	Class A1
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 12%
Carbon Footprint	**EPD Verified** *(2020)* **50mm** 11.77kgCo^2e/m^2 **60mm** 14.29kgCo^2e/m^2 **80mm** 20.22kgCo^2e/m^2
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breeam rating www.**bre**.co.uk	**50/60mm: A**, according to the Green Guide to Specification, 4th Edition 2009. **A+**, can be achieved by using a recycled sub-base. **80mm: B**, in according to the Green Guide to Specification, 4th Edition 2009. **A**, can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us
GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email
technical@tobermore.co.uk
sales@tobermore.co.uk

Pedesta



Stock

product	size (mm)	colours available	in stock	m² per pack	m² per slice	no. per m²	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
Pedesta 50mm	200 x 100 x 50	Bracken, Brindle, Charcoal, Heather, Jet Black, Natural, Slate	YES	14.40	2.40	50	720	1626	1616
Pedesta 60mm BIM	200 x 100 x 60	Bracken, Brindle, Charcoal	YES	13.44	2.24	50	672	1807	1797
Pedesta 80mm	200 x 100 x 80	Bracken, Brindle, Charcoal, Heather, Natural	YES	9.6	1.6	50	480	1724	1714

BIM - This product is available to download from our website in BIM Level 2 format.

Bracken



Heather



Brindle

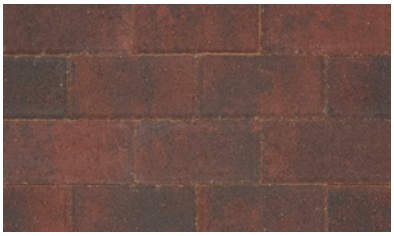

Slate



Natural



Charcoal



Jet Black



Contact Us
GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email
technical@tobermore.co.uk
sales@tobermore.co.uk