

1 1/2" Bath Tidy Waste and Plug

BTW404/017

Installation Instructions & Maintenance Guide

Connection: 1 1/2" fitting

Construction: Stainless steel and ABS

Features:

- Extendable overflow tube
- Brass plug
- Plug stores neatly in overflow face



Methven recommends this product should be fitted in compliance with Water Regulations, by a qualified plumber.

Care & Cleaning

Your product has a high-quality finish and should be treated with care to preserve the visible surfaces. Never use abrasives or abrasive cleaning agents to clean this product clean regularly with contamination free warm water and a damp soft cloth. Do not use products containing chlorine bleach or hydrochloric acid as these can damage the product.

Warranty Information

Your product has a warranty of 1 year.

Proof of purchase will be required.

The guarantee does not cover faults or damage caused by incorrect installation and/or maintenance, ordinary wear and tear, water composition, etc.

*Please see www.deva-uk.com for full terms and conditions of warranty.

We have a policy of continuous improvement and reserve the right to change specifications without notice.

METHVEN UK LIMITED

METHVEN EXPERIENCE CENTRE

3/3A STONE CROSS COURT

YEW TREE WAY

GOLBORNE

WARRINGTON

WA3 3JD

UNITED KINGDOM

TEL: 0800 195 1602

FAX: +44 (0) 1942 680 190

EMAIL: sales@uk.methven.com

www.deva-uk.com

www.methven.com



1 1/2" Bath Tidy Waste and Plug

BTW404/017

Installation Instructions & Maintenance Guide

Connection: 1 1/2" fitting

Construction: Stainless steel and ABS

Features:

- Extendable overflow tube
- Brass plug
- Plug stores neatly in overflow face



Methven recommends this product should be fitted in compliance with Water Regulations, by a qualified plumber.

Care & Cleaning

Your product has a high-quality finish and should be treated with care to preserve the visible surfaces. Never use abrasives or abrasive cleaning agents to clean this product clean regularly with contamination free warm water and a damp soft cloth. Do not use products containing chlorine bleach or hydrochloric acid as these can damage the product.

Warranty Information

Your product has a warranty of 1 year.

Proof of purchase will be required.

The guarantee does not cover faults or damage caused by incorrect installation and/or maintenance, ordinary wear and tear, water composition, etc.

*Please see www.deva-uk.com for full terms and conditions of warranty.

We have a policy of continuous improvement and reserve the right to change specifications without notice.

METHVEN UK LIMITED

METHVEN EXPERIENCE CENTRE

3/3A STONE CROSS COURT

YEW TREE WAY

GOLBORNE

WARRINGTON

WA3 3JD

UNITED KINGDOM

TEL: 0800 195 1602

FAX: +44 (0) 1942 680 190

EMAIL: sales@uk.methven.com

www.deva-uk.com

www.methven.com




Installation


Sealant can be used on all joints to aide in sealing.

1. Extend the overflow tube, undo the overflow face and remove from the overflow elbow. Unscrew the fixing screw and disassemble the waste flange assembly.
2. Offer up the overflow elbow and rubber elbow washer to the outside of the bath overflow hole and check the three way joint connects to the waste hole to check for fit.
3. Attach the overflow elbow and washer to the outside of the bath, fit the overflow face washer and overflow face to the inside of the bath, do not over tighten or use excessive pressure to secure.
4. Place the waste flange washer and flange on the inside of the bath in the waste hole. Use sealant if deemed necessary. Attach the three way joint and joint washer to the underside of the bath and secure together with the fixing screw. Once sealant is dry check for leaks. Fit the plug into the overflow face to store when not in use.

Exploded Diagram

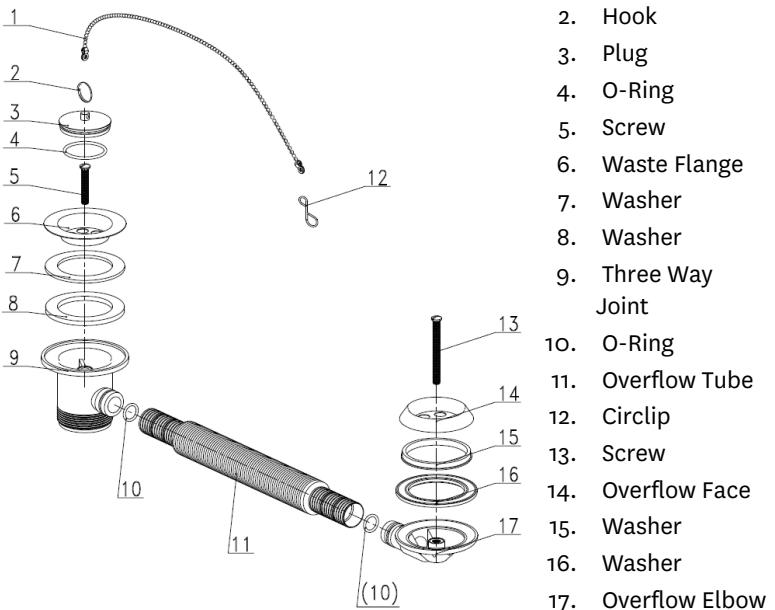

Line Drawing (mm)

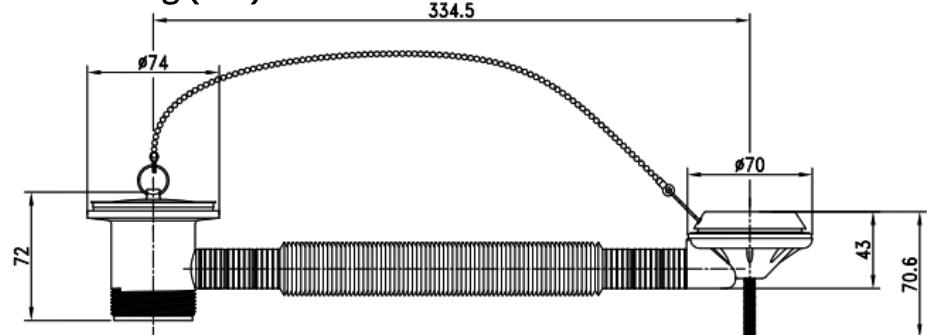


Installation

Sealant can be used on all joints to aide in sealing.

1. Extend the overflow tube, undo the overflow face and remove from the overflow elbow. Unscrew the fixing screw and disassemble the waste flange assembly.
2. Offer up the overflow elbow and rubber elbow washer to the outside of the bath overflow hole and check the three way joint connects to the waste hole to check for fit.
3. Attach the overflow elbow and washer to the outside of the bath, fit the overflow face washer and overflow face to the inside of the bath, do not over tighten or use excessive pressure to secure.
4. Place the waste flange washer and flange on the inside of the bath in the waste hole. Use sealant if deemed necessary. Attach the three way joint and joint washer to the underside of the bath and secure together with the fixing screw. Once sealant is dry check for leaks. Fit the plug into the overflow face to store when not in use.

Exploded Diagram

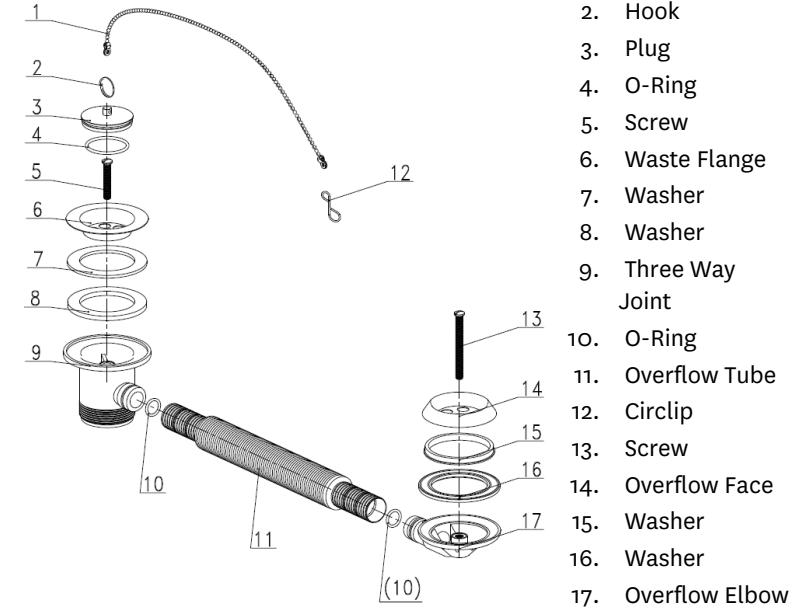

Line Drawing (mm)

