

Dene Cool Touch Bar Mixer

Thermostatic Mixer Shower

Product Codes

Dene Cool Touch Bar Mixer Shower	UNDETHBMCT
----------------------------------	------------

Installation

- 15mm push-fit (fixings to pipe) 3/4" flat face union (valve to fixings)
- 1/2" BSP bottom

End User

- Cool touch feature - ensures that the valve remains comfortable to touch
- Durable design with ceramic disc flow control
- Suitable for all systems, including gravity fed
- Includes all of the fittings, featuring the popular push-fit surface bracket
- Riser rail shower kit with adjustable wall fixings
- Three spray pattern shower head
- 1.25m anti-twist hose





Dene Cool Touch Bar Mixer

Thermostatic Mixer Shower

Shower

Temperature Control	Thermostatic
Plumbing System Compatibility	All systems
Inlet Fittings	Push-fit for pipe tails
Inlet Connection	15mm female push fit
Outlet Connection	1/2" BSP male
Minimum Running Pressure/Flow	0.1 Bar @ 8 l/min
Maximum Running Pressure	5 Bar
Maximum Static Pressure	10 Bar
Flow Rate (min pressure)	3 l/min
Approvals, Complies with	BS EN1111, 1287: WRAS (valve only)
Guarantee	5 years

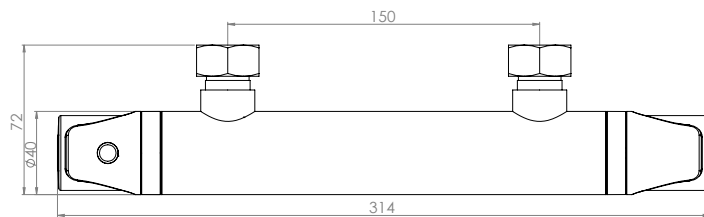

Riser Rail Kit

Standard version

Length	Approx 530mm
Diameter	19mm
Material	Stainless steel
Hose	1.25m anti-twist



Lara Multi Spray Shower Head
TSHMLAR3POSCH

Lewis Shower Raiser Rail
TSKLEWCH



1.25m Anti-twist Hose - Chrome
TSHG1203

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers.co.uk/specifiers

(1) Tri-Therm™ constantly regulating flow, blending water and adjusting the power to precisely control the showering temperature.
 (2) Safe-Set™ tamper proof maximum temperature setting whilst allowing full rotation of the temperature dial.
 (3) The shower will operate down to 0.5 bar at reduced flow rates.