

## Warranty Information

Proof of purchase will be required.

The guarantee does not cover faults or damage caused by incorrect installation and/or maintenance, ordinary wear and tear, water composition, etc.

\*Please see [www.deva-uk.com](http://www.deva-uk.com) for full terms and conditions of warranty

## Cleaning

Your product has a high-quality finish and should be treated with care to preserve the visible surfaces. Never use abrasives or abrasive cleaning agents to clean this product clean regularly with contamination free warm water and a damp soft cloth. Do not use products containing chlorine bleach or hydrochloric acid as these can damage the product.

We have a policy of continuous improvement and reserve the right to change specifications without notice.

METHVEN UK LIMITED  
METHVEN EXPERIENCE CENTRE  
3/3A STONE CROSS COURT  
YEW TREE WAY  
GOLBORNE  
WARRINGTON  
WA3 3JD  
UNITED KINGDOM

INST-GEN305  
V1 01.10.2023

TEL: 0800 195 1602  
FAX: 0844 406 8690  
EMAIL: [sales@uk.methven.com](mailto:sales@uk.methven.com)  
[www.deva-uk.com](http://www.deva-uk.com)  
[www.methven.com](http://www.methven.com)

# GENOA Bridge Sink Mixer

Chrome

GEN305

Installation Guide

---

## Technical Specification

### Working Pressure:

Min: 0.1 Bar

Max: 5.0 Bar

### Operating Temperature:

Hot: 65°C

Cold: 5°C

### Inlet Connections:

½" BSP

### Features:

- Suitable For High & Low Pressure Systems
- ¼ Turn Ceramic Disc
- H & C Temperature Indicator
- Single Flow Sink Mixer With Swivel Spout And Pre-Fitted Flow Straightener
- Tap Height 383mm,
- Spout Height 290.5mm
- Spout Reach 181mm
- Plastic Backnuts
- Waste Not Included



Congratulations on your purchase of your new Deva by Methven Sink Mixer. Our fitting instructions have been created with you in mind to provide you with all the information you require and, if you need any further help, please don't hesitate to contact our customer care team on 0800 195 1602.

Please keep these instructions for future reference and request of replacement parts

## Contents

General Safety Information	3
Line Drawing	3
Product Breakdown	4
Product Breakdown	4
Installation Requirements	6
Installation	6
Troubleshooting	7
Warranty Information	8
Cleaning	8

## Troubleshooting

Symptom	Cause(s)	Resolution
Mixer Not Turning On	Mains Water supply is turned off	Turn on the mains water supply
	Closed isolation valve	Open isolation valve
No Hot Water	Cold override	Check if the pressure is balanced. Fit pressure equalising valve.
Low Flow Rate/No Flow	Water supply failure	Investigate water supply, check plumbing and heating system for any faults.
	Partially closed isolation valve	Open isolation valve
	Air lock or partial blockage in the supply pipework or hoses	Flush through pipework to ensure removal of debris and any airlocks.
Water Dripping From The Mixer	Water being drawn off elsewhere causing pressure changes or instantaneous boiler temperature changes. Ensure minimum pressure is being met.	Try not to use other water outlets when using the mixer.
	This is normal for a short time after using the mixer.	This is due to residual water tension, the build up of water in the mixer spout.
	If water continues to drip, possible issue with the flow control cartridge.	Please contact our customer care team.

## Installation Requirements

Before commencing installation of the new product, ensure that the system has been flushed to remove any debris, which could cause damage to the valves and invalidate the warranty.

### Installation

- 1, Remove the back nuts and back nut washers from the threaded connections.
- 2, Offer the tap up to the holes in the sink, ensuring that the base rings and base ring washers are correctly positioned, fully covering the mounting holes.
- 3, On the underside of the sink fit the washers and back nuts onto the threaded tails tighten until the tap is secure in the mounting hole.
- 4, Connect the water supply pipes to the tails and tighten.
- 5, Reinststate water supply and test for leaks.

## General Safety Information

Please read all of the instructions before installation.

Methven recommends this product is installed by a competent person in compliance with all relevant regional regulations.


Remove all packaging and check the components for damage before starting installation.

This product **must** not be modified in any way as this will invalidate the guarantee.

It is the responsibility of the installer to ensure a waterproof seal is achieved, after installation all connections must be checked for leaks.


All outlets used primarily for personal hygiene shall deliver water at a safe temperature as per regional regulations.

### Line Drawing

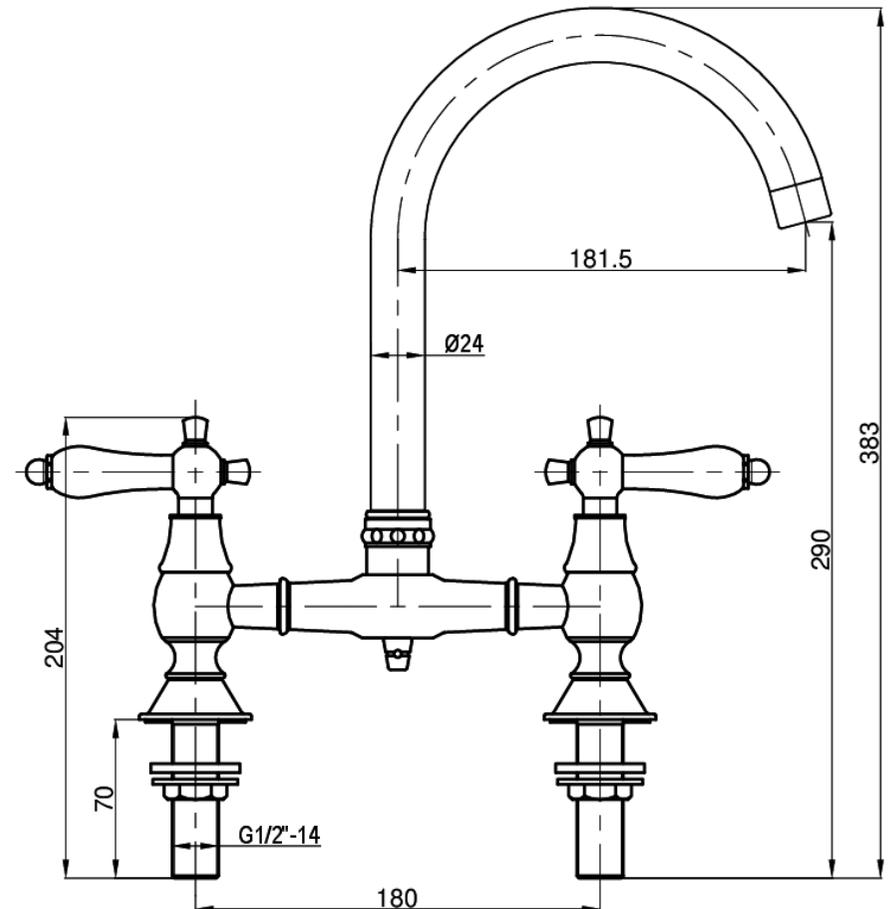

## Product Breakdown

Check All components are present prior to starting installation.

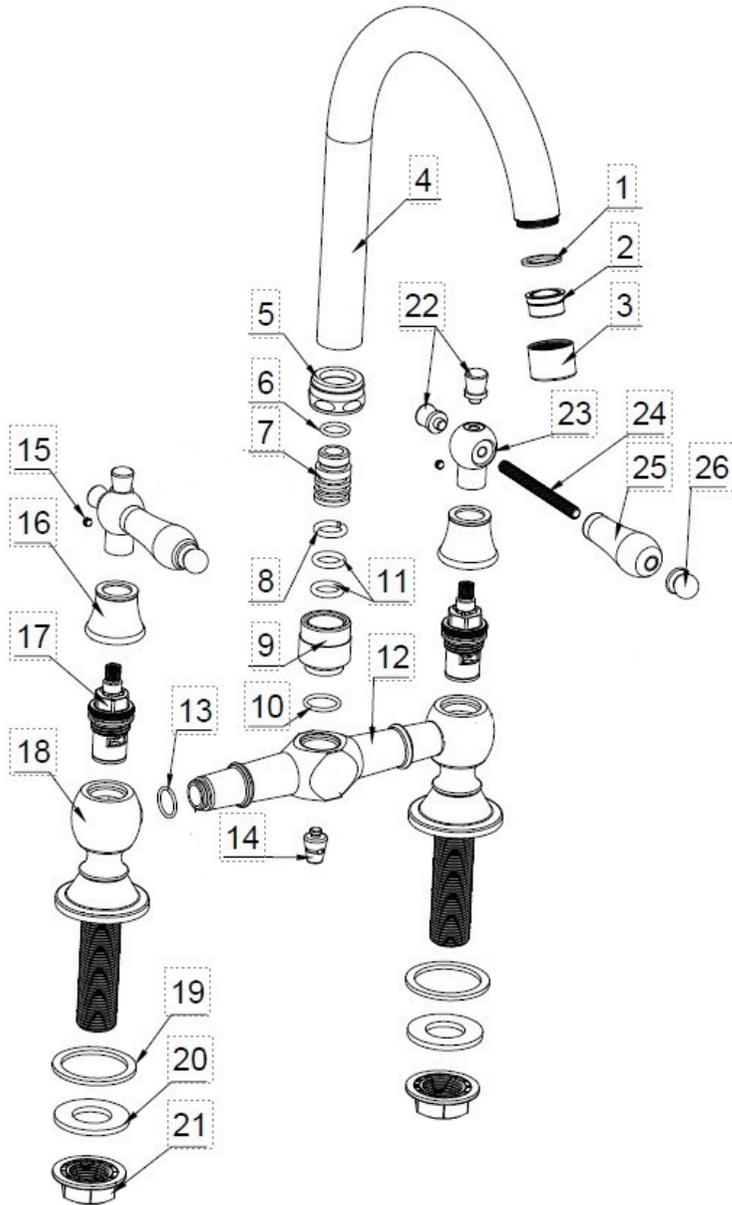

Item Number	Item Description
1	Washer
2	Aerator
3	Aerator Housing
4	Spout
5	Connector
6	O-Ring
7	Spout Connector
8	Circlip
9	Spout Connector
10	O-Ring
11	O-Ring
12	Sink Mixer Body
13	O-Ring
14	Spout Screw
15	Grub Screw
16	Cartridge Cover
17	1/4 Turn Ceramic Disc
18	Sink Pillar
19	Washer
20	Backnut Washer
21	Backnut ABS
22	Handle Screw
23	Handle Body
24	Threaded Bar
25	Handle
26	Handle Screw