


Shelbourne Flag

The ground surface of Shelbourne gives this range a sophisticated feel and eye-catching look. Shelbourne Flags can work in any landscape design.



Pedestrian
Use

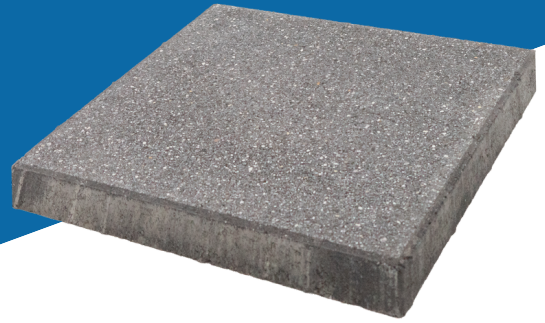

Light Traffic
Class 3 only




Slip
Resistance




Eco
Range


Colour Profile

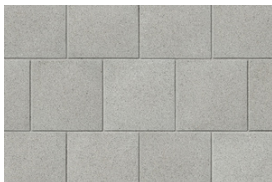

Silver Granite

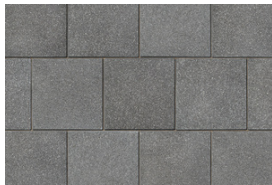

Black Granite

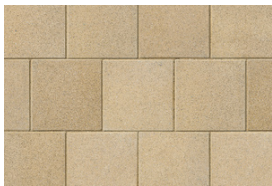

Buff Granite

3D Profile



Features

- Manufactured from ground granite aggregate concrete for superior strength and finish
- Refined surface texture created using premium granite aggregates
- A modern alternative to natural stone or porcelain paving
- Flexible laying patterns: suitable for stack bond or stretcher bond, depending on unit size
- Available in three standard colours with a subtle ground finish, and bespoke colours available to order
- Clean edges and minimalist surface texture reflect contemporary design trends

Benefits

- Exceptional durability due to increased cement content and premium granite surface
- Maintains certified slip resistance throughout its full lifecycle—unlike natural granite or porcelain
- More cost-effective to supply and install than traditional granite or porcelain alternatives

Sizing



400 x 400



450 x 450



600 x 300



600 x 400



600 x 600



600 x 900

Packaging Information

Dimensions (mm)	Colours	Pcs per m2	m2 per Bale	Pcs per Bale	Pcs per Layer	No of Layers	Approx Bale Weight (kg)	Profile
400x400x50	Silver Granite, Black Granite, Buff Granite	6.25	11.52	72	6	12	1240	Chamfer
450x450x50	Silver Granite, Black Granite, Buff Granite	4.94	11.34	56	4	14	1298	Square Edge
600x300x50	Silver Granite, Black Granite, Buff Granite	5.55	11.88	66	6	11	1316	Square Edge
600x400x50	Silver Granite, Black Granite, Buff Granite	4.16	11.52	48	4	12	1313	Square Edge
600x600x50	Silver Granite, Black Granite, Buff Granite	2.78	10.8	30	2	15	1340	Chamfer
400x400x63	Silver Granite, Black Granite, Buff Granite	6.25	10.8	54	6	9	1177	Chamfer
600x600x63	Silver Granite, Black Granite, Buff Granite	2.78	8.64	24	2	12	730	Chamfer
900x600x63	Silver Granite, Black Granite, Buff Granite	1.85	7.56	7	2	7	1095	Square Edge
450x450x70	Silver Granite, Black Granite, Buff Granite	4.94	8.1	40	4	10	1225	Square Edge
400x400x80	Silver Granite, Black Granite, Buff Granite	6.25	6.72	42	6	7	1134	Chamfer

Technical Performance and Data

Product Type	Concrete Flag Paving
Product Standard	EN 1338: 2003
Manufacturing Method	Hydraulically pressed semi - dry concrete
Finish	Ground granite aggregate finish
Package Information	Baled, strapped and plastic cover
Slip/Skid Resistance	Low - USRV/ PTV 40-74 as per EN 1339: 2003 Table NA.4. Test values typically > 60
Strength	Compliant to EN 1338: 2003
Application & Trafficking	Product suitable for pedestrian traffic & may be suitable for vehicular traffic when designed and installed in conjunction with the correct, site specific sub - base design as per the relevant BS7533 standard depending on the product size & depth
Joint	Shelbourne Flag paving have a 1.5mm approx. internal spacer nib which will give a resulting standard joint width of approx. 2mm when laid. Joints should be filled with kiln dried sand. Note that silver granite kiln dried sand must be used for silver and buff colour option to reduce potential staining.
BREEAM	A rated in accordance with Green Guide Specification Edition 4, 2009. A+ rated when used in conjunction with a prepared recycle sub - base.