

Loft Ladder - Not Fire Resistant COMPLETE


Insulated Loft Ladder With Wooden Frame

ADVANTAGES

- Checked DIN EN 14975 (2010)
- Insulated loft ladder with insulated hatch 33 mm thick
- U-value 1,2 W/m²K
- No joints on all around seal
- Hatch both sides white
- Opener recessed in hatch
- Strong solid wooden frame 27 mm thick
- Special strong 27 mm steps
- Steel safety handrail
- Equipped with stair shoes
- Complete assembled ready to be built in
- Holds weight 150 kg

OPTIONS

- ISO-upper lid set (plus 87)
- Paneling Minka Fix 27 mm
- Hatch safety rail
- Blower-Door-Set

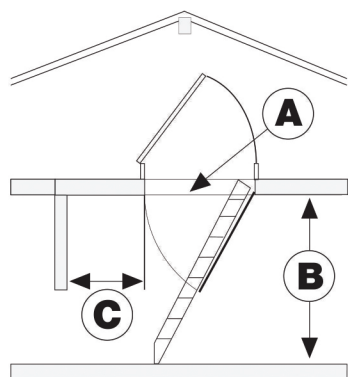

A rough opening size	frame size	B floor to ceiling height	C landing space	item no.	ISO-OD Plus 87
120/54 ¹⁾	119/53/13	-280	55	10340	10704
120/60	119/59/13	-280	55	10343	10713
120/70	119/69/13	-280	55	10344	10714

1) no safety rail