



# FLEXINET™

## FFP3D - VALVED - 832

HIGH EFFICIENCY (99% MINIMUM) FILTERING WITH EXHALE VALVE & FULLY ADJUSTABLE 4-POINT HARNESS


### TECHNICAL SPECIFICATION

#### RESPIRATORY PROTECTION

#### DIMENSIONS OF OUTER PACKAGING

Quantity: 50 (10 inner packs of 5 masks)

Weight: 4kg (Approx.)

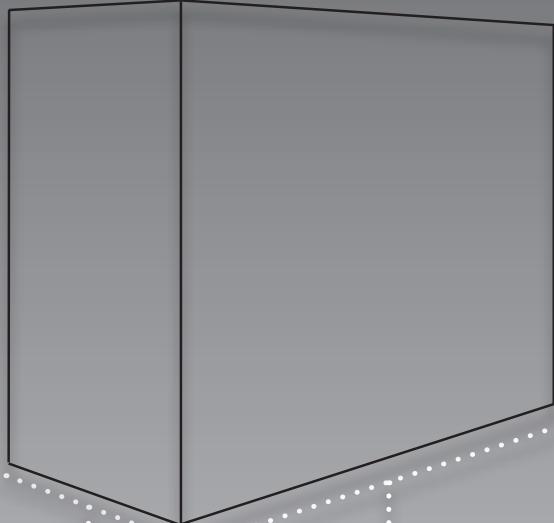

HEIGHT:  
224mm

LENGTH:  
702mm

WIDTH:  
327mm




#### DIMENSIONS OF MASK

Length: 207mm

Width: 140mm

Height: 70mm

Weight: 41g (Approx.)

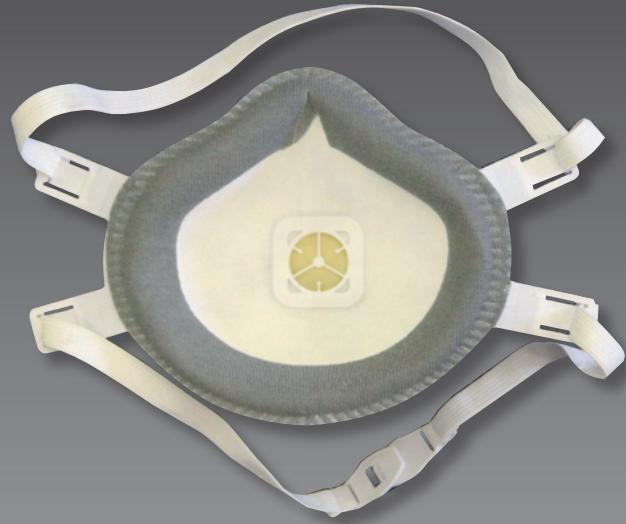

#### FLEXINET™ FEATURES

**Flexible Cover:** Flexible cover to protect and retain the shape of the mask during long periods of wear

**Face Seal:** Improved face seal for added comfort

**Grill:** To protect the wearer against possible damage to the filter. Hand welded seal allows for extremely efficient sealing

**Modern Valve:** Modern design valve allows for lower breathing resistance

#### LIMITATIONS OF USE

Protection will only be offered if the mask is fitted correctly

The mask, when in contact with the skin may cause allergic reactions to susceptible individuals

If this occurs leave the hazard area, remove mask and seek medical advice

The use by date is printed on the outer packaging

Do not use where exposure to chemical gases may be experienced

Use in well ventilated areas only, which are not deficient in oxygen and do not contain explosive atmospheres

Ensure good seal around the face is created before entering the hazard area

The working life of the mask is nominally one day (this is based on an working day shift of 8 hours), however it may be affected by many factors, including work rate, airflow and concentration of any contaminant in the atmosphere. The mask should be changed immediately if,

- Breathing difficulties due to clogging are experienced,
- Breakthrough of a contaminant is detected by smell, taste or any other means, or
- The mask becomes damaged

This mask is not designed to be worn by people with facial hair

