


DUNSTON FLEXI SINK MIXER

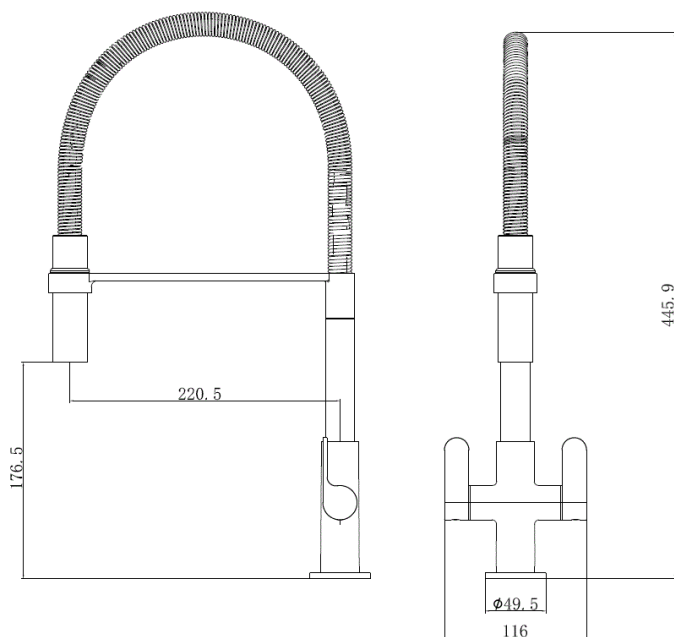

CONSTRUCTION: Brass

CARTRIDGE/VALVE TYPE: Ceramic Disc

SUPPLY: Suitable for all plumbing systems

INLET CONNECTIONS: 1/2" BSP

WORKING PRESSURES: 0.3 - 5.0 bar

OPERATION: Separate Flow And Temperature Controls

- On trend design perfectly complements contemporary kitchens
- Pull down nozzle is ideal for rinsing pots and pans
- Dual handles are fitted with ceramic discs for ease of operation
- Optimised to operate at 6 litres per minute in order to save water
- Chrome plated finish
- In full colour packaging

DUSMCP

Open Outlet Flow (Bar - l/min)

BAR	0.3	0.5	1.0	2.0	3.0	4.0	5.0
SPOUT FLOW	1.84	2.42	3.37	4.2	4.1	4.4	4.6

Chrome



Please Note: Flow rate will be dictated by installation configurations.
Please ensure to check the appropriate flow restrictor information if applicable.

*Please refer to website for full warranty details.

FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM

methven.com

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.