



Issued 08/14

## VINYL SILK

Dulux Vinyl Silk is a top quality washable emulsion based on unique AkzoNobel technology, providing a tough, mid-sheen finish. Where condensation is a problem, for example some kitchens and bathrooms, use Dulux Diamond Eggshell. Suitable for all normal interior wall and ceiling surfaces.

### Composition (nominal)

Pigment: Lightfast Pigments.

Binder: PVA Copolymer Emulsion.

Solvent: Water.

### Volume Solids

Pure Brilliant White – 35%; Other colours will vary.

### KEY BENEFITS

- Tough, Washable Finish
- High Opacity
- Coverage up to 16m<sup>2</sup> Per Litre

### PRODUCT INFORMATION

#### Typical Use

Suitable for interior use on all normal interior wall and ceiling surfaces.

#### Pack Size

2.5L, 5L and 10L.

#### Colour Range

See appropriate Dulux Trade colour literature

#### Film Properties

Chemical Resistance: Not suitable.

Heat Resistance: Not suitable for use on heated surfaces, such as radiators.

Water Resistance: Will tolerate the levels of atmospheric humidity present in normal interior environments and will withstand moderately vigorous washing. Where frequent heavy bathrooms, Dulux Diamond Eggshell is more suitable.

### SURFACE PREPARATION

To get the best results with Dulux Vinyl Silk, make sure surfaces to be painted are sound, clean, dry (new surfaces particularly must be fully dry).

Remove all loose and defective paint. Special precautions should be taken during surface preparation of pre-1960s paint surfaces over wood and metal as they may contain harmful lead.

Where necessary, wash the surface to remove dirt, grease and powdery or dusty residues. Rinse with clean water and allow to dry. Seal surfaces that remain powdery after thorough preparation with an appropriate plaster sealer.

Where necessary, rub down and then wipe off with a damp, lint free cloth to avoid dust. condensation is likely, as in some kitchens and Any surface defects should be filled with the appropriate Polycell Trade Polyfilla.



Issued 08/14

## VINYL SILK

### SYSTEMS INFORMATION

STIR THOROUGHLY BEFORE USE. Seal new or bare surfaces with a thinned first coat of Dulux Vinyl Silk (up to 1 part clean water to 5 parts paint). The normal finishing process is 2 full coats of Dulux Vinyl Silk, but on previously painted surfaces in good condition where similar colours are used, 1 coat may be sufficient.

For best colour consistency, purchase sufficient tinted paint for each job including touch-in at one time from the same source.

### APPLICATION METHOD

Brush, roller, conventional spray or airless spray.

As with other water-based paints, do not apply at temperatures below 7°C (as recommended by British Standard BS 6150).

#### Practical Coverage

A guide to the practical coverage which can be achieved under normal conditions is up to 16m<sup>2</sup> per litre.

#### Thinning

Sealing new or bare surfaces: Add up to 1 part clean water to 5 parts paint.

Normal use (not to be exceeded): Add up to 1 part clean water to 10 parts paint.

Conventional spray application: Add up to 1 part clean water to 5 parts paint.

Airless spray application: Thinning is not required.

#### Spray Recommendations

Conventional Spray: Satisfactory through most equipment. Airless Spray: A typical set up for airless spray would be a minimum working pressure on paint of 133 bars (2000lb/sq in) with a spray tip size of 0.38mm (15 thou) and a spray tip angle of 65°.

#### Drying Times

Single coat at standard thickness: Touch Dry: Dependent on temperature and humidity. Recoat: 2-4 hours.

#### Cleaning Up

After use, remove as much product as possible from equipment before cleaning with water.

When this paint container is empty please ask your stockist about recycling. If you have leftover paint, please dispose of it responsibly and consider donating it to Community RePaint. Find out more at [dulux.ie](http://dulux.ie)

#### Transportation & Storage

Do not use or store in extremes of temperature and protect from frost. To prevent spillage, please store and transport upright.

#### VOC

EU limit value for this product (cat.: A/b): 30g/l (2010). This product contains max. 1.5g/l VOC. VOC content: Minimal (0-0.29%).



414

Issued 08/14

**VINYL SILK**


## FURTHER SUPPORT

If you need further support, please contact the Dulux Technical Advice Centre on +353 21 422 0222

*Always read full Health, Safety & Environmental Information on can before use.*

Safety datasheet (SDS 414) is available free on request by telephoning the Dulux Technical Advice Centre or by visiting [dulux.ie](http://dulux.ie)

AkzoNobel, the AkzoNobel logo, the Flourish logo, Dulux Trade, Mouldshield, Polycell, Polyfilla, Community RePaint and the Planet Possible logo are trademarks of the AkzoNobel group. © AkzoNobel 2014.

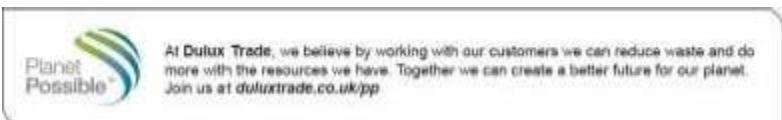

**AkzoNobel**